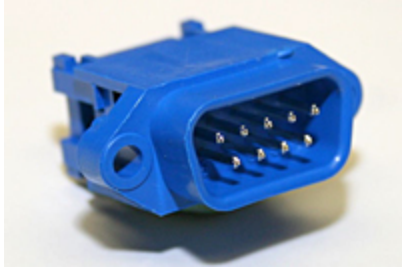


CW INDUSTRIES130 James Way
Southampton, PA 18966

Phone: 215-355-7080 • Fax: 215-355-1088

Email: info@cwind.com • Website: <http://www.cwind.com>**Item # CWR-183-15-0021, D-Subminiature All-Plastic-Connectors**[Check Distributor Stock](#) · [Specifications](#)**Check Distributor Stock**

Check Distributor Stock	MICROWAVE COMPONENTS INC
-------------------------	--

Specifications

Style	IDC
Mounting	Plastic Shell Closed End Cover
Plating	30μ in. Gold Over 50μ in. Nickel
Number of Contacts	15
Terminal	Socket Contact
Contacts	Phosphor Bronze Standard
Insulator Material	UL 94V-0 Flame Retardant Thermoplastic
Minimum Cover Pull-Off Force (Force Along Contacts Primary Axes)	8 oz/contact
Strain Relief Cover	Standard
Typical Withdrawal Force	2-8 oz/contact
Color	Blue
Operating Temperature	-55 to +125 °C
Maximum Current Rating (Per Contact)	1 A
Dielectric Withstand Voltage	Greater Than 500 VDC at Sea Level
Insulation Resistance	5 x 10 ⁹ ohms
Listing Agency (Consult drawing or factory for specific rating)¹	 Listed Agencies
Compliance	

¹ Due to ongoing advancements, additional agency certifications may be available, contact us for more information.