


ROHS COMPLIANT

# PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 45290	11/20	BNK

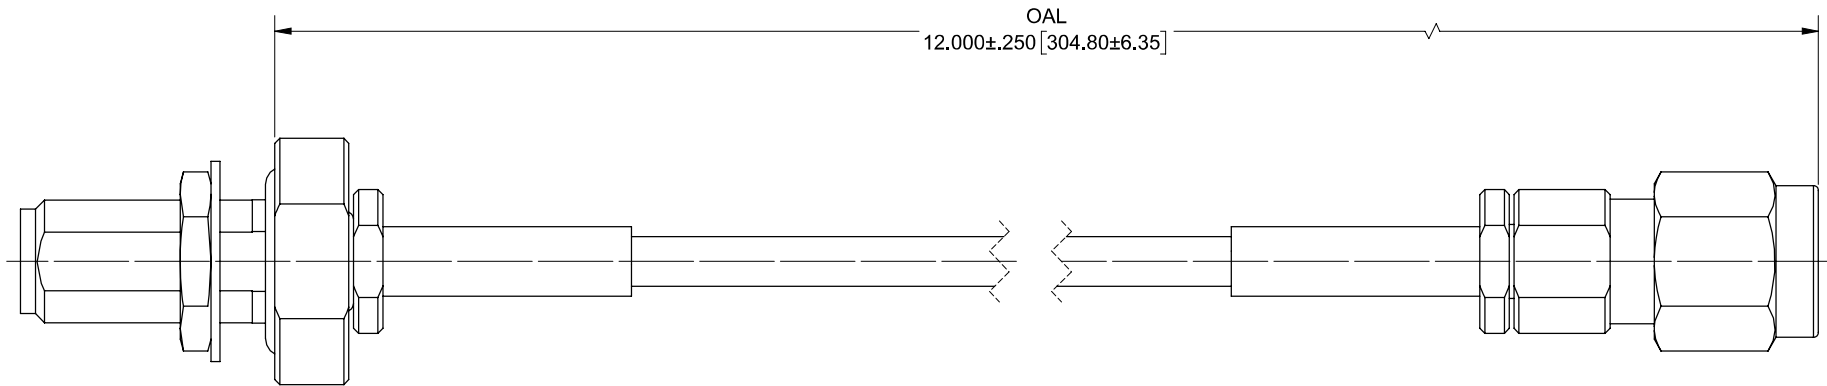

**MATERIAL:**

CONNECTORS: 2.92mm FEMALE IP68 (1521-60189)  
2.92mm MALE (SF1511-60071)

CABLE: T-FLEX 405 (200-70-139)

STRAIN RELIEF: M23053/5

**PERFORMANCE:**

IMPEDANCE: 50 OHMS  
FREQ. RANGE: DC TO 40.0 GHz.

MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1° X°X' ±15'	UNLESS OTHERWISE SPECIFIED	
FINISH: SEE NOTES	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005	1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS (3) MIL-STD-10. 6) DIA. 3: ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	
SURFACE AREA: N/A	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	TITLE: 2.9MM STR. IP68 BLKHD F TO 2.9MM STR. M TFLEX 405 CABLE ASSEMBLY SIZE DWG. NO. B 7015-1050	
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.	THIRD ANGLE PROJECTION 	DRAWN: JPM 11/02/20 CHECKED: BNK 11/02/20 APPROVED: BNK 11/02/20	SCALE: 4:1 SHEET 1 OF 1