


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 44798	05/20	JPM
A	DCN 50786	05/21	BNK

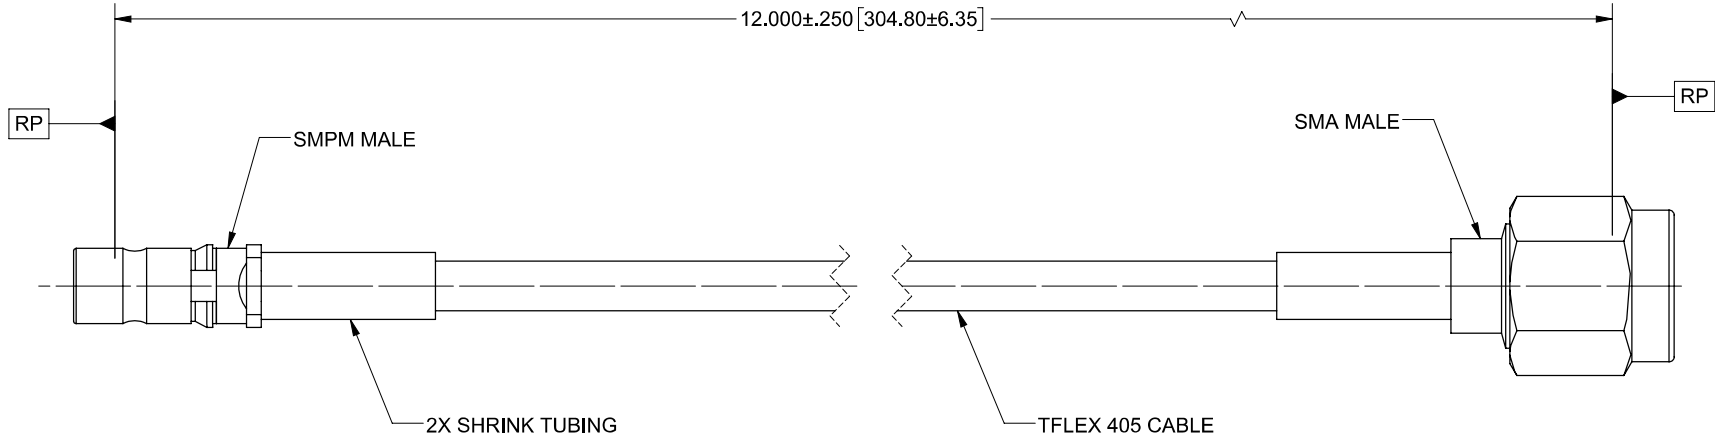

MATERIAL:



CONNECTORS: SMPM MALE SB (3211-60350)
SMA MALE (SF2906-6002)

CABLE: TFLEX 405 (200-70-139)

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 18.0 GHz.

MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1° X°X' ±15'	UNLESS OTHERWISE SPECIFIED	 Amphenol www.svmicrowave.com
FINISH: SEE NOTES	DECIMAL: .X ±.030 .XX ±0.0 .XXX ±.005	1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS (3-MIL-STD-10) 6) DIA. 3: ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	
SURFACE AREA: N/A	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	THIRD ANGLE PROJECTION	TITLE: SMPM MALE V67.3 TO SMA MALE 12" TFLEX405 CABLE ASSEMBLY
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		DRAWN: BNK 05/05/20	SIZE DWG. NO. 7032-7840
		CHECKED: JPM 05/05/20	
		APPROVED: JPM 05/05/20	SCALE: 4:1
			SHEET 1 OF 1