

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LR	DESCRIPTION	DATE	OWN	APVD
AJ	00				
	C	REVISED PER ECO-14-008329	4JUN14	AM	MY

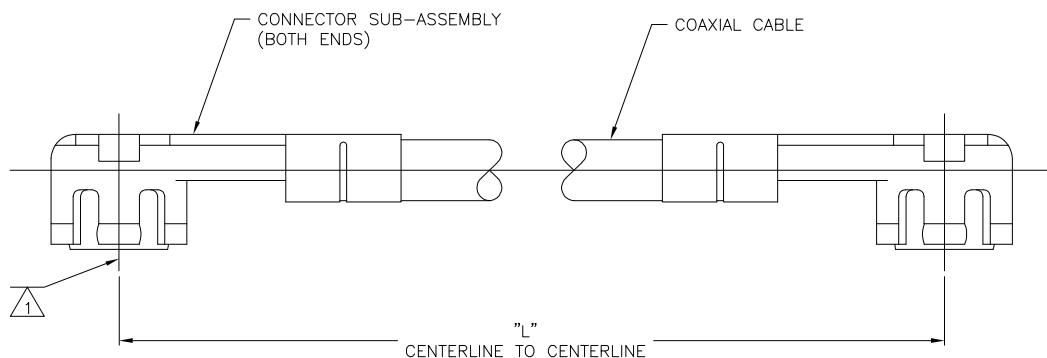

330 $\pm$ 5	1064533-3
915 $\pm$ 10	1064533-2
315 $\pm$ 5	1064533-1
"L"	PART NUMBER

ELECTRICAL	
FREQUENCY	DC - 6 GHz
NOMINAL IMPEDENCE	50 OHMS
VOLTAGE RATING	250 VOLTS (VRMS MAX) @ SEA LEVEL
VSWR (MATED CONNECTORS ONLY)	1.20:1 MAX @ 2 GHz 1.40:1 MAX @ 6 GHz
INSULATION RESISTANCE	1,000 MEGOHMS MIN @ 250VDC
DIELECTRIC WITHSTANDING VOLTAGE	500 VOLTS (VRMS MIN) @ SEA LEVEL

MECHANICAL	
CONNECTOR DURABILITY	100 MATING CYCLES

ENVIRONMENTAL	
TEMPERATURE RATING	-40°C(-40°F) TO +125°C(257°F)

### PRODUCT SPEC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN DK_SCHRUM 04MAY2006	TE Connectivity
		CHK KE WEIDNER 04MAY2006	
DIMENSIONS:		APVD KE WEIDNER 04MAY2006	NAME
mm		PRODUCT SPEC	
		APPLICATION SPEC	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		SIZE	
0 PL C	$\pm$ -	CAGE CODE	
1 PL C	$\pm$ -	DRAWING NO	
2 PL C	$\pm$ -	RESTRICTED TO	
3 PL C	$\pm$ 0.13	A2 00779 ©=1064533	
4 PL C	$\pm$ -	SCALE 15:1 SHEET 1 OF 1 REV C	
ANGLES	$\pm$ 1'	CUSTOMER DRAWING	
MATERIAL	FINISH	WEIGHT	
-	-	-	

COMPONENT	MATERIAL	FINISH
<u>SSMT CONNECTOR</u>		
OUTER CONTACT	BERYLLIUM COPPER	GOLD PLATE OVER NICKEL PLATE
CENTER CONTACT	BERYLLIUM COPPER	GOLD PLATE OVER NICKEL PLATE
DIELECTRIC	POLYPROPYLENE, GF	N/A
<u>CABLE</u>		
JACKET	FLUORINATED ETHYLENE PROPYLENE (FEP)	N/A
SHIELD	COPPER WIRE, 44 AWG	SILVER PLATE
DIELECTRIC	POLYTETRAFLUOROETHYLENE (PTFE)	N/A
CENTER CONDUCTOR	COPPER CLAD STEEL, 30 AWG	SILVER PLATE