




1103004A00E-000

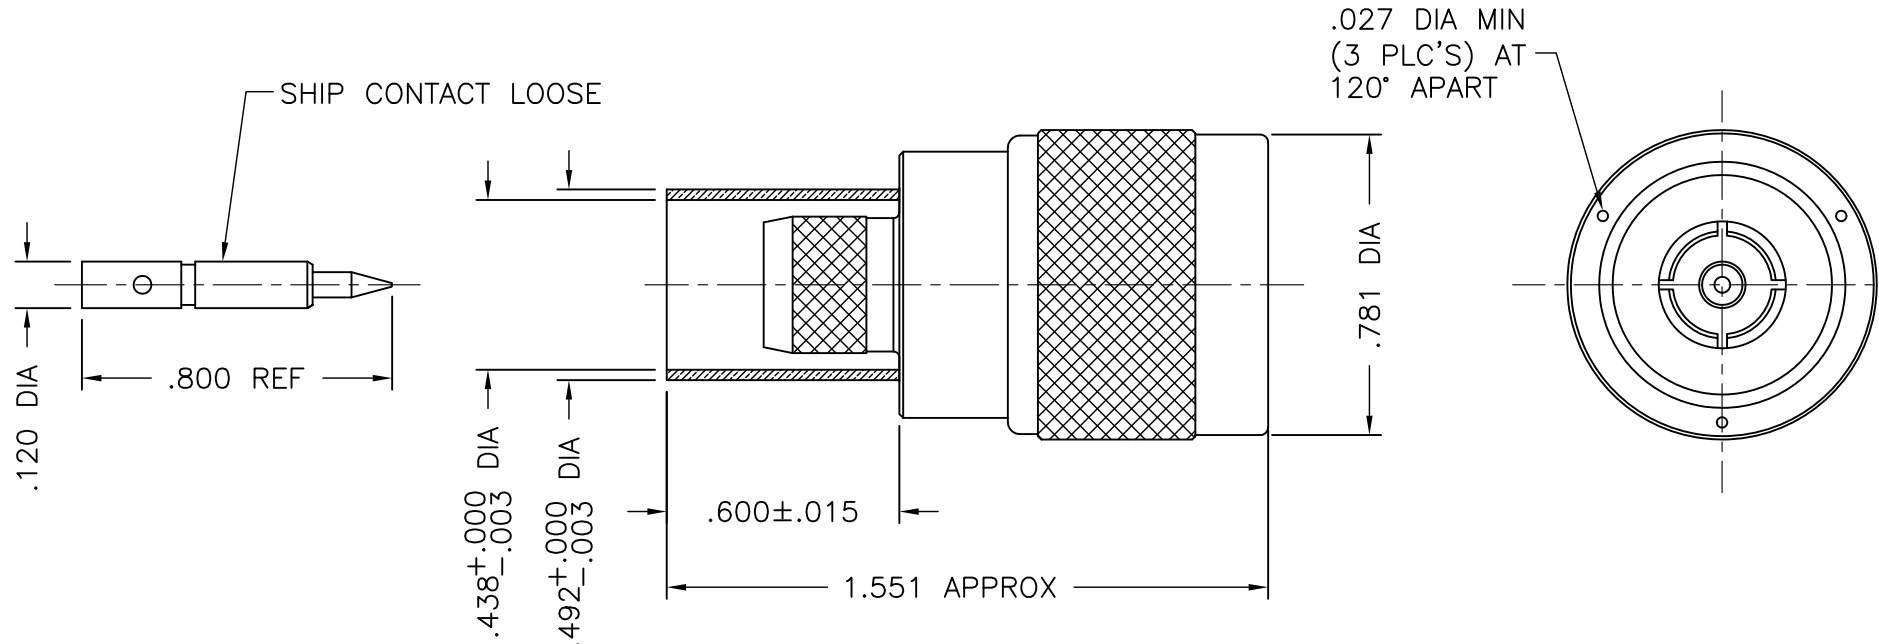

**NOTES:**

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: BODY, CONTACT, OUTER CONTACT & COUPLING NUT- BRASS PER ASTM B16  
 CRIMP SLEEVE - D.H.P. COPPER CDA, ALLOY #122 TEMPER HARD  
 INSULATOR - TEFLON PER ASTM D1710  
 GASKET - SILICONE RUBBER PER ZZ-R-765  
 LOCKING RING - PHOSPHOR BRONZE PER QQ-B-750
3. FINISHES: CONTACT - GOLD PER PER MIL-G-45204  
 CRIMP SLEEVE - SULFAMATE NICKEL PER MIL-P-27418  
 ALL OTHER METAL PARTS - SILVER PLATE PER QQ-S-365

UNLESS OTHERWISE SPECIFIED: TOLERANCES: 3 PLACES = ±.005, 2 PLACES = ±.02, ANGLES = ±1/2'

A	REVISED	6/9/94
-	OUTLINE	12/19/13
ALT.	REVISIONS	DATE

M39012/01-0501

DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915

TITLE: 'N' CRIMP PLUG FOR RG-214,  
393 & 225/U CABLE

Drawn by ERIC 12/19/13	Scale 2/1	Ckd. by BJM	Engr Appd BJM	FILE NAME: 1103004A00E-000T
------------------------------	--------------	----------------	------------------	--------------------------------

CODE IDENT.-00795

1103004A00E-000

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.