


SD

M55339/19-00565

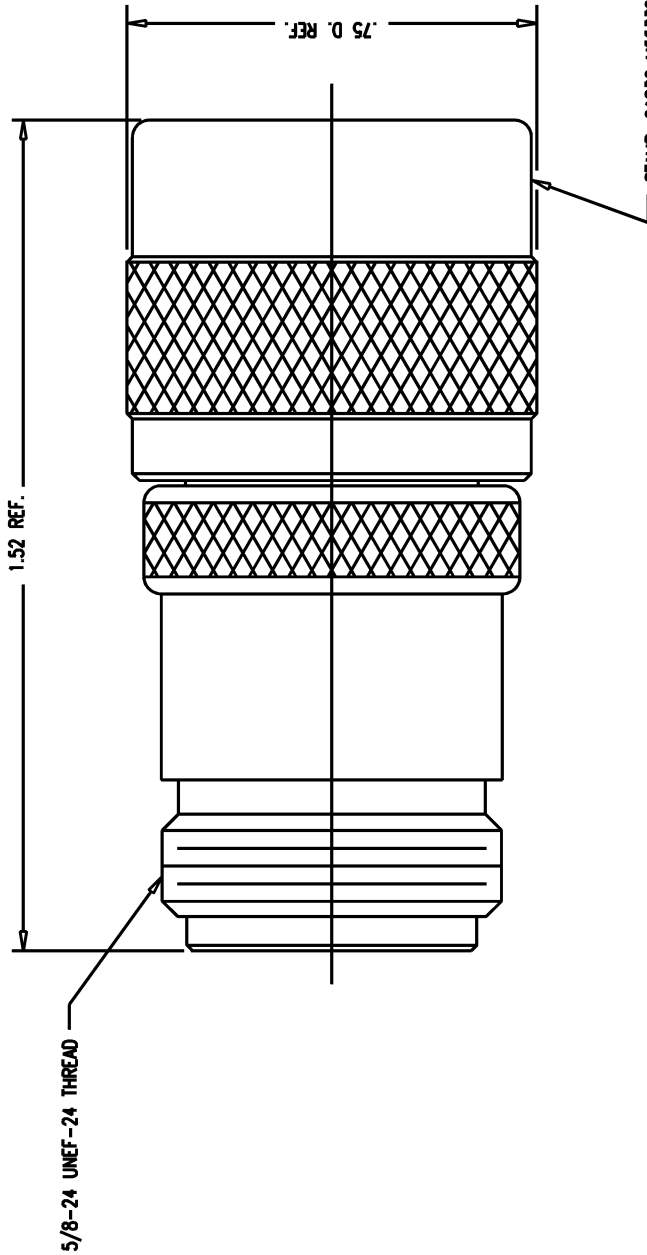

NOTES:

1. N INTERFACE PER MIL-STD-348, FIG. 304-2.
2. C INTERFACE PER MIL-STD-348, FIG. 302-1.

3. MATERIALS:

- INSULATORS- TEFLON, ASTM-D-4894
- GASKET- SILICONE RUBBER, ZZ-R-765
- CENTER CONTACT } BER. COP., ASTM-B-196
- OUTER CONTACT } SPRING WASHER
- C RING- HARD DRAWN COPPER WIRE PER QQ-W-336
- ALL OTHER PARTS-BRASS, ASTM-B16

4. FINISHES:

- CENTER CONTACT & C RING- GOLD PLATE PER MIL-G-45204
- OUTER CONTACT & SPRING WASHER-SILVER PLATE PER QQ-S-365
- ALL OTHER METAL PARTS-SILVER PLATE PER QQ-S-365

5. ELECTRICAL CHARACTERISTICS:

- NOMINAL IMPEDANCE-50 OHMS
- WORKING VOLTAGE-1000 VRMS
- FREQUENCY RANGE-DC TO 11 GHZ

REVISIONS

ISSUE

CHANGES

1	RESTRICTED USAGE NM 06/30/77
2	RESTRICTION REMOVED ER 18105 NM 03/02/78
3	CN 23170 E MA 03/19/82
4	CN 35618 D ME 01/09/95
5	CN 37594 C REDRAWN TML 02/16/00
6	CN 38329 E TML 06/01/01

SCALE 4:1

1209-15S

APPROX SURFACE AREA

1209-15

USED ON

REF:

ADAPTER N(F)-C(M)

DRAWN	JHP	DATE	06/10/77
DESIGN		DATE	
APPR.	JC	DATE	09/27/77

SKINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

M55339/19-00565

SD